




Forward Manufacturing Co., Inc.

Low Rise Tire Lift



**10000TL - 10,000 lbs. capacity
low-rise lift**

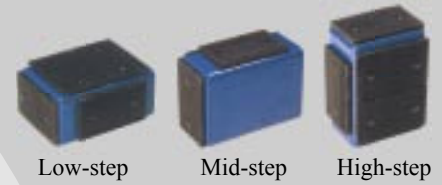

**10000TL - 10,000 lbs. capacity
low-rise lift**

Serving our customers for 5 decades

10000 / 70000TL

- 10,000 lb Capacity
- Drive-over ramps and side rails provide the width to support wider vehicles during approach
- Dual lifting cylinders provide the power required to lift a 10,000 lbs. vehicle
- 7,000 lbs. capacity model available



**7000TL - 7,000 lbs. capacity
low-rise lift**



The new Forward TIRE LIFT series is your solution for quick service operation on today's passenger cars and light trucks. Tire and brake work can now be performed on a wider variety of vehicles with the newly designed pads and adapters, wider drive-over capability and increased lifting capacity.

Great Value from Forward Lifts:

- Easy to set up
- Low maintenance lift
- Low investment to own and operate



Advantages of Forward Lifts:

- Quick set-up for undercarriage repairs and wheel service maintenance
- Low Maintenance style lift – durable and proven
- Great Value as low investment to own & operate

Benefits of buying Forward lifts:

- Designed to rigid safety standards
- Best distributor network in the industry
- Best Value in the industry
- Skilled service support and prompt response

The Very Best Distribution Network in the Automotive Repair Equipment Industry



Forward Manufacturing Co., Inc.
 996 Industrial Drive
 Madison, IN 47250
 Phone: 800.423.1722
 Fax: 812.273.7329

www.forwardlift.com


Lit# ForwardTL_2006.01

©2006 Forward[®]. Printed in U.S.A., All Rights Reserved.
 Unless otherwise indicated, FORWARD DOVER and all other trademarks are property of Dover Corporation and its affiliates.

Engineered to Perform... Built to Last

Specifications	7000 HDL	10000 HDL
Capacity	7,000 lbs.	10,000 lbs.
A. Rise	24 3/4"	30 5/16"
High Step	N/A	28 1/16"
Mid Step	23 1/4"	26 1/16"
Low Step	21 3/4"	21 3/4"
B. Flat	90 1/2"	90 1/2"
C. Width Overall	70 3/4"	84 1/2"
D. Width Between Platforms	22 3/4"	22 3/4"
E. Length of Platform	51 1/4"	51 1/4"
F. Length of Pad	17"	17"
G. Outside Width Of Platforms	70 3/4"	70 3/4"
Horizontal Movement (during rise)	16"	16"
Collapsed Height	4"	4"
Locking Leg Heights	13 3/8" 17 3/8" 21 3/8"	13 3/8" 17 3/8" 21 3/8"
Voltage Single Phase	115v	115v
Time of Full Rise	40 seconds	40 seconds

Specifications subject to change without notice or liability

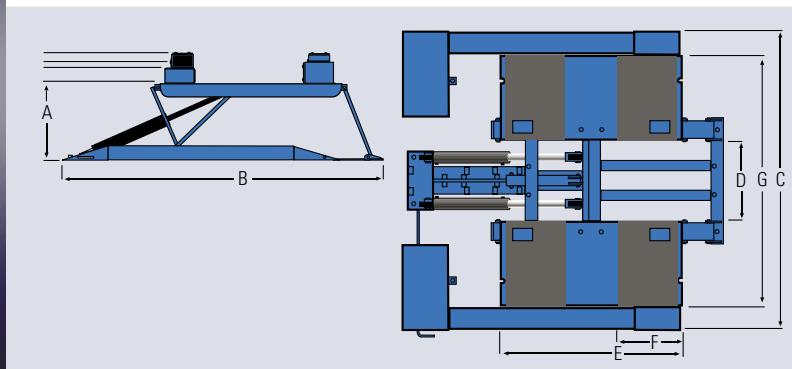

Authorized Forward Distributor: